

RACK END PROTECTION GOLF



Technical Information

Tested to withstand force of (Joule)	DFRE 1-2 + DFRE 2-2: 10.000 J DFRE 1-4 + DFRE 2-4: 2.500 J
Vehicle weight equivalent (kg)	DFRE 1-2 + DFRE 2-2: 5.000 kg DFRE 1-4 + DFRE 2-4: 2.000 kg
Vehicle equivalent speed (km/h)	DFRE 1-2 + DFRE 2-2: 7,2 km/h DFRE 1-4 + DFRE 2-4: 5,7 km/h
Equivalent angle of impact	90°
Deflection zone	250 mm

Material Properties




Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

CO2 / m ³	20 kg
Recyclability	100%

Other

Standard Warranty 5 years

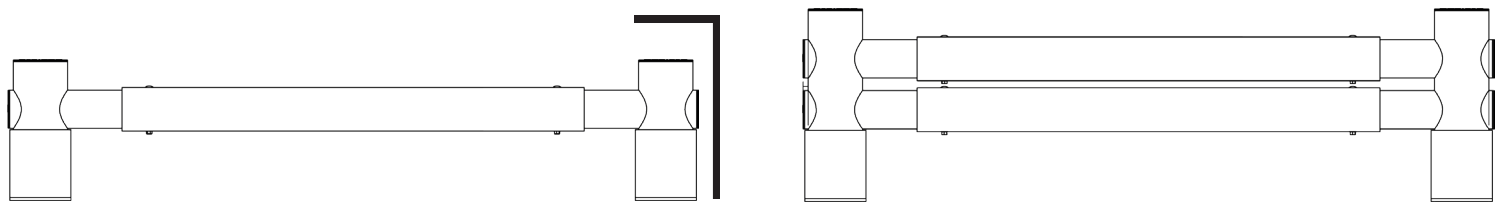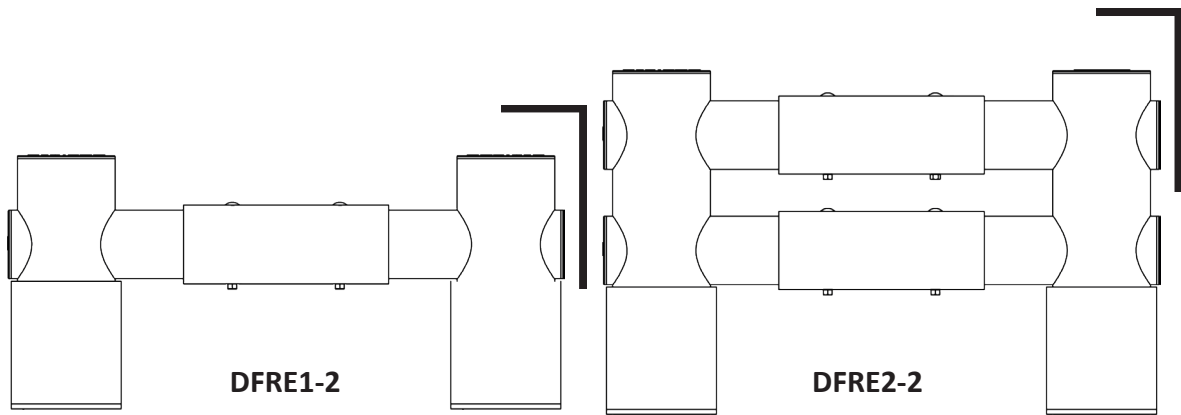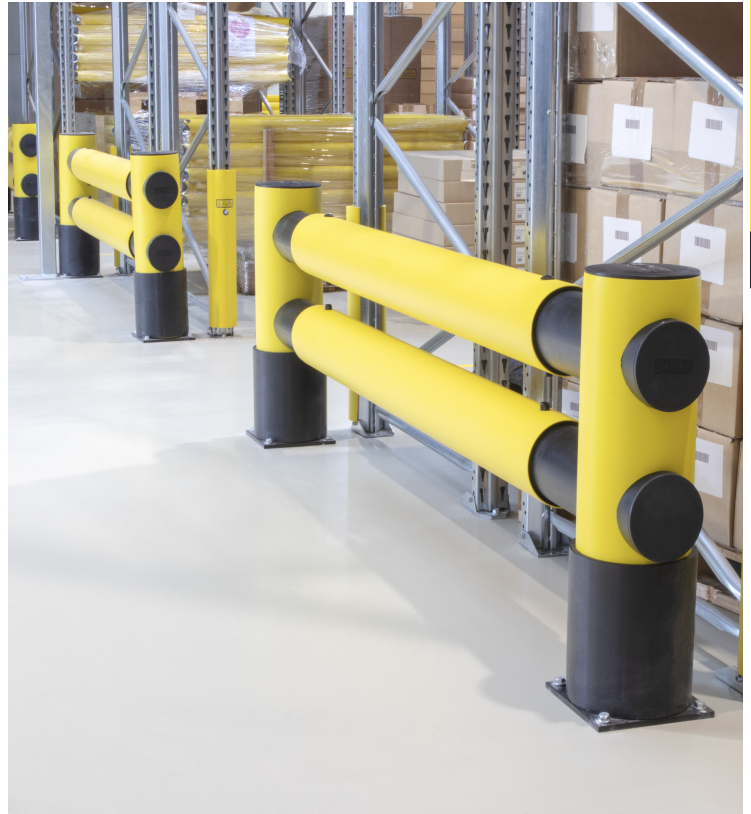

DFRE1-4

DFRE2-4

Art. No.	Description	Width	Height	Weight
DFRE1-2	Rack end protection, single rail	1100 mm	516 mm	23,6 kg
DFRE1-4	Rack end protection, single rail	2500 mm	516 mm	26,2 kg
DFRE2-2	Rack end protection, double rail	1100 mm	706 mm	25,6 kg
DFRE2-4	Rack end protection, double rail	2500 mm	706 mm	28,6 kg

Article description	Rack end protection, single rail
Item number	DFRE1-2
EAN	4250912311350
Customs tariff number	39269097
Height	516 mm
Width	225 mm
Length	1100 mm
Diameter	
Deflection zone	250 mm
Net weight	23,6 kg
Material	Polyethylene
Color	Yellow (like RAL 1018 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	8
Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
Fixing dimensions	M12X85



Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°





Environment


CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

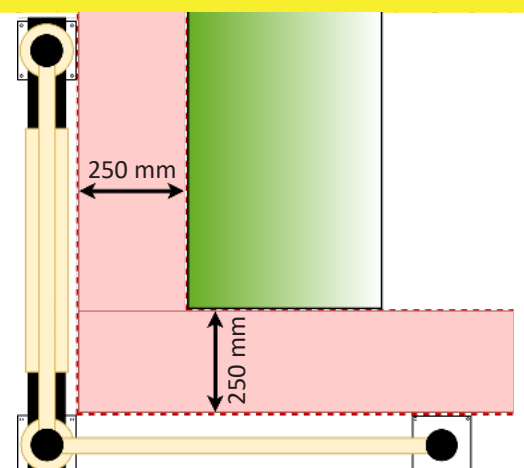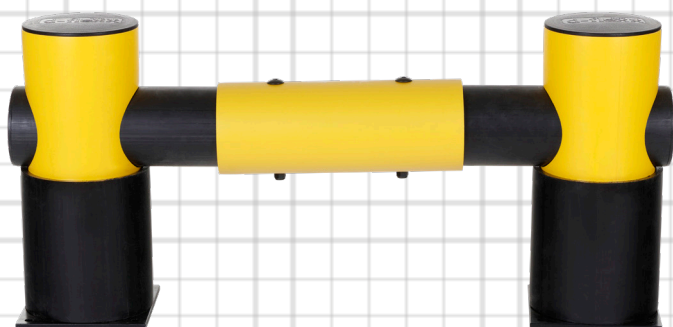


Article description	Rack end protection, single rail
Item number	DFRE1-4
EAN	4250912311367
Customs tariff number	39269097
Height	516 mm
Width	225 mm
Length	2500 mm
Diameter	
Deflection zone	250 mm
Net weight	26,2 kg
Material	Polyethylene
Color	Yellow (like RAL 1018 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	8
Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
Fixing dimensions	M12X85

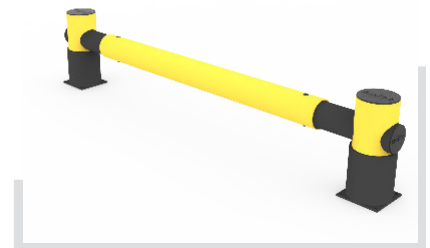

Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


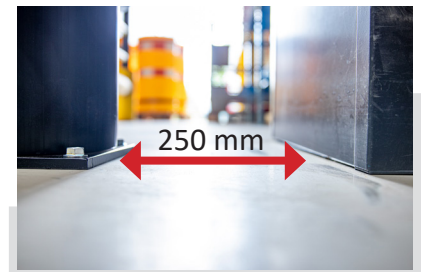


Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty 5 years

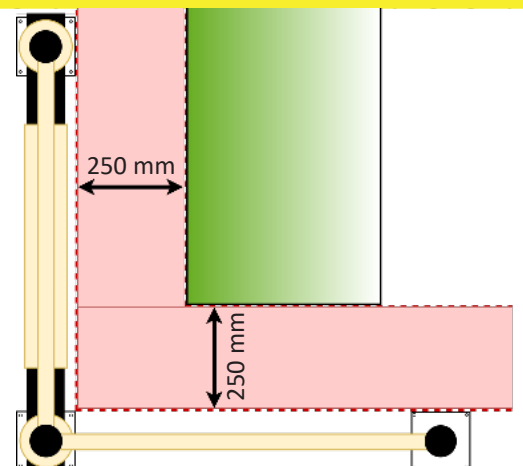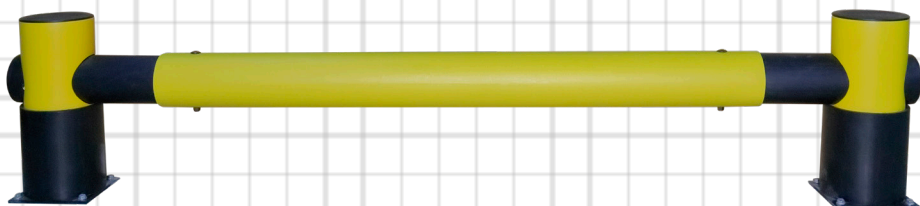

Article description Rack end protection, double rail
Item number DFRE2-2
EAN 4250912311374
Customs tariff number 39269097



Height 706 mm
Width 225 mm
Length 1100 mm
Diameter
Deflection zone 250 mm

Net weight 25,6 kg
Material Polyethylene
Color Yellow (like RAL 1018 traffic yellow) / black
Indoor use Yes
Outdoor use Yes
Boreholes 8
Fixing The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
Fixing dimensions M12X85



Material Properties

Chemical Resistance high- ISO/TR 10358
Temperature Range -10° up to + 50°





Environment

CO₂ / m³ 20 kg
 Recyclability 100%

Other

Standard Warranty 5 years

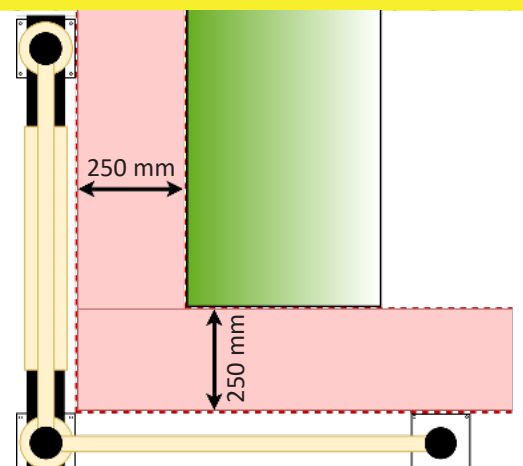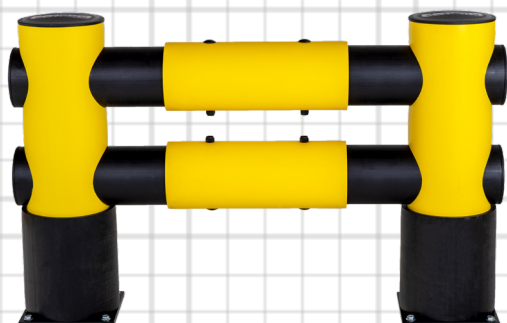


Article description Rack end protection, double rail
Item number DFRE2-4
EAN 4250912311381
Customs tariff number 39269097




Height 706 mm
Width 225 mm
Length 2500 mm
Diameter
Deflection zone 250 mm

Net weight 28,6 kg
Material Polyethylene
Color Yellow (like RAL 1018 traffic yellow) / black
Indoor use Yes
Outdoor use Yes
Boreholes 8
Fixing The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
Fixing dimensions M12X85

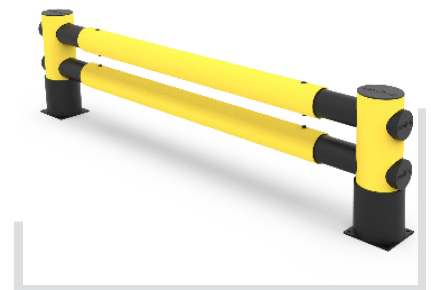

Material Properties

Chemical Resistance high- ISO/TR 10358
Temperature Range -10° up to + 50°

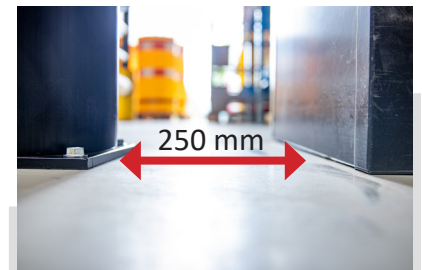

Environment

CO₂ / m³ 20 kg
 Recyclability 100%

Other

Standard Warranty 5 years

